



点彩石艺



LIQUID GRANITE PAINT

vanlei万磊®



根据天然花岗岩石材表面效果,通常可分为平面和质感两种类型

- 平面型:即平面、光面的花岗石材效果
- 质感型:即有一定特定纹理型、如浮雕、火烧面、以及拉毛面等不同花岗岩效果

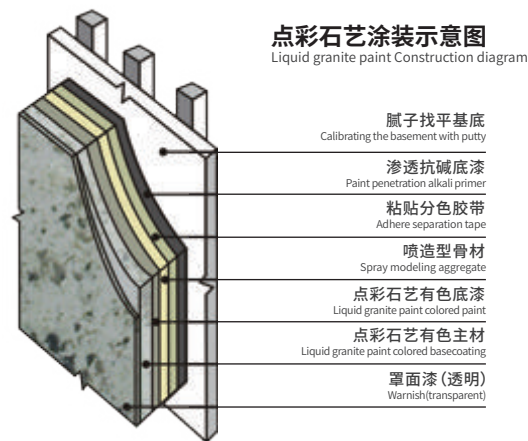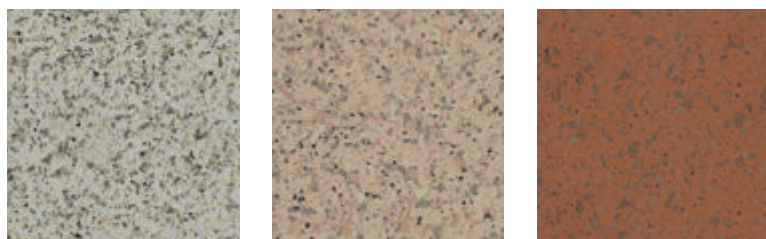

施工	材料	加水比例	参考用量	涂刷次数	间隔时间	施工方式
1、基底	杂物、灰尘等附着物应清除干净,务必具有干燥平滑的涂装面					
2、底涂(一)	A/金装白色封闭底漆	20%	5-7m ² /kg	1	3H	刷涂、辊涂
	B/金装渗透底漆	20%	5-7m ² /kg	1		
3、底涂(二)	高弹性同色底漆(可选)	10%	5-7m ² /kg	1	4H	
4、填缝处理	按设计图样分割,以墨线标定,接满缝大小,以胶带黏贴处理					
5、中涂	A/点彩石艺主材	/	0.4-0.6kg/m ²	2	24H	喷涂
6、填缝处理	中涂主材施工完后,立即将胶带除去形成勾缝					
7、面涂	A/金装外墙哑光保护面漆	15-20%	5-7m ² /kg	1-2	24H	刷涂、辊涂
	B/金装外墙(亮光)保护面漆	15-20%	5-7m ² /kg	1-2	24H	
	C/金装荷叶抗污面漆	15-20%	5-7m ² /kg	1-2	24H	

注意:点彩石艺理论用量仅供参考,因气候条件,底材条件,施工工具,喷涂密度等不同因素而有差异



点彩石艺

LIQUID GRANITE PAINT

多彩花岗岩一点彩石艺即外观最接近天然花岗岩的一种多彩类涂料,借助简单喷涂工具,喷附在建筑物表面上,使其有花岗岩面之外观,打破了传统意义上的石头漆、岩片漆,突破了花岗岩石头的自身重量和用量,让人们有一种返朴归真的感觉为涂料界的一大创新。

产品特点

- A、抗污性好(装饰效果持久、耐碱防漆膜粉化褪色)
- B、良好的耐候性(可防无变黄)
- C、良好的防水,零渗透率
- D、高安全性(重量只有天然石漆的1/6,干挂石材的1/40)
- E、耐酸碱性,可以应用于海边和高度盐雾区
- F、使用寿命长(采用氟硅树脂,具有极强的稳定性,使用寿命20年)
- G、白粉病抗性-ASTMG21 Ograde(包括无霉变)

适用范围

- 工法多样风格迥异,每种风格都有不同的视觉美感
- 不受基面造型影响,适合多种基面,任意涂装
 - 运用电脑调配色彩、不易褪色、涂层较厚,抗紫外线
 - 优越的耐候性、耐碱性、耐久性和密著性,色泽亮丽
 - 可用于内墙、外墙、线条板、装饰性、特殊性造型等

适用基面

砂浆面、水泥砂浆面、石膏板、混泥土面、清水模面、金属板
预制混泥土板、铝板等

配套工具

辊筒、专用喷枪、无气喷涂机

参考用量

抗碱底漆5-7m²/kg 有色底涂4-5m²/kg
点彩石艺主材2-3kg/m² 面漆5-7m²/kg

执行标准

JG/T24-2001《合成树脂乳液砂壁状建筑涂料》
GB24408-2009《建筑用外墙涂料中有害物质限量》

点彩石艺

LIQUID GRANITE PAINT

Liquid granite paint is a kind of water-based paint with the appearance closest to the granite, which, with the help of simple spray gun, adheres the paint to the surface of the building, so that the building become granite. It is a breakthrough in the world of paints as it breaks through the weight and volume of granite stones themselves.

Features

- A, good stain resistance (long-lasting decorative effect, alkali resistance against chalking and fading of the paint film)
- B, good weather resistance (can prevent no yellowing)
- C, good waterproof, zero permeability
- D, high security (weight only 1/6 of natural stone paint, 1/40 of dry hanging stone)
- E, acid and alkali resistance, can be applied to the seaside and high salt spray area
- F, long service life (using fluorosilicone resin, with extreme stability, service life of 20 years)
- G, powdery mildew resistance-ASTMG21 Ograde (including no mold)

Application

- Different styles, each style has different visual aesthetics
- Unaffected by the shape of the substrate, suitable for a wide range of substrates, arbitrary painting.
 - Computerized color mixing, not easy to fade, thicker coating, UV resistance.
 - Excellent weather resistance, alkali resistance, durability and adhesion
 - Can be used for interior wall, exterior wall, line board, decorative, special modeling, etc.

Substrates

Mortar surface, cement mortar surface, gypsum board, concrete surface, fresh water mold surface, metal plate Prefabricated concrete panels, aluminum panels, etc.

Tools


Rollers, special spray guns, airless sprayers

Dosage

Exterior Primer 5-7m²/kg Midcoat 4-5m²/kg
Liquid Granite Paint 2-3kg/m² Exterior Top Coat 5-7m²/kg

Standard


JG/T24-2001 "synthetic resin emulsion sand wall architectural coatings"
Gb24408-2009 limits of harmful substances in exterior wall coatings for building

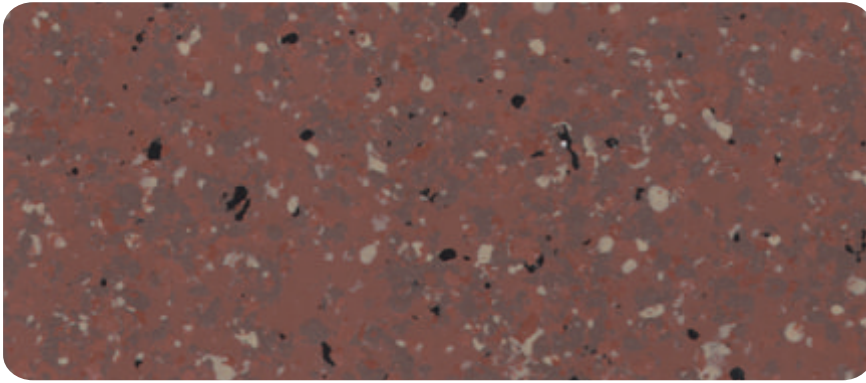

4D01




4D02

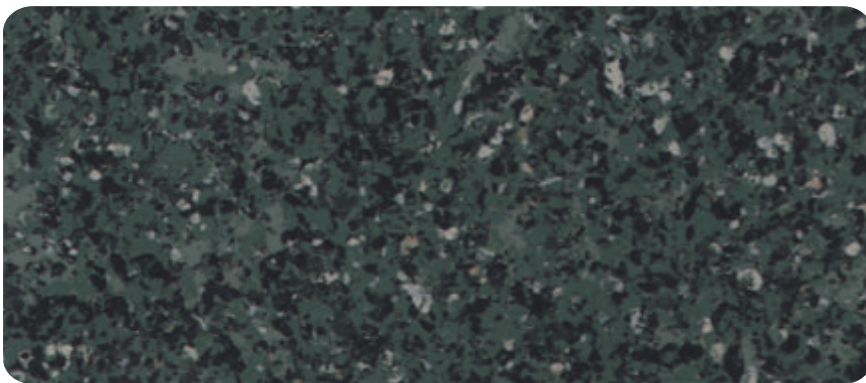

4D03




4D04

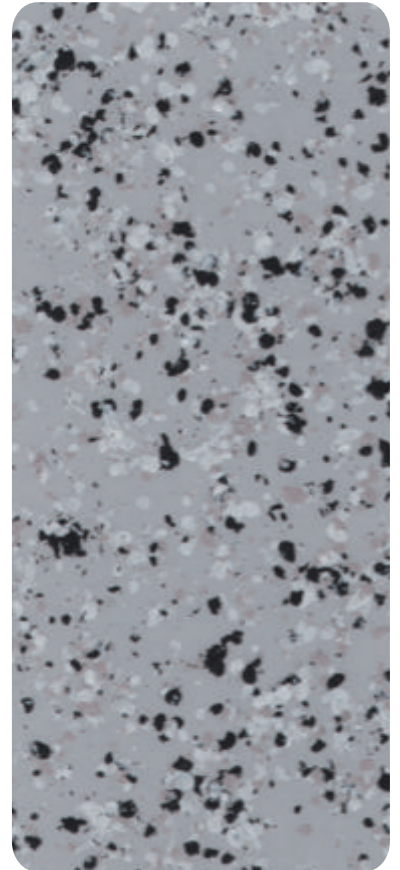


4D05




4D06

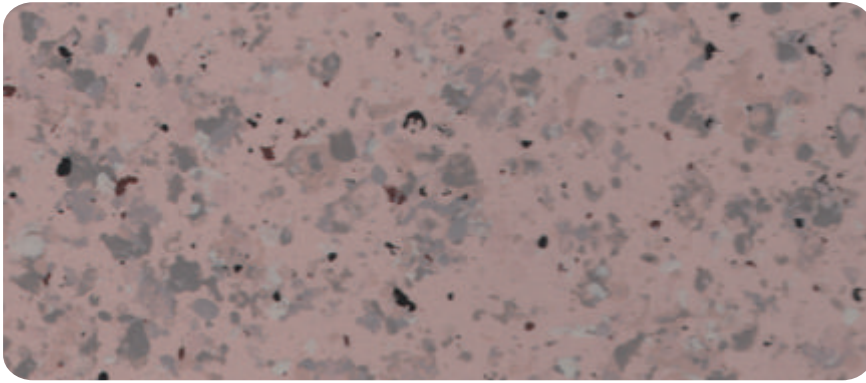


4D07

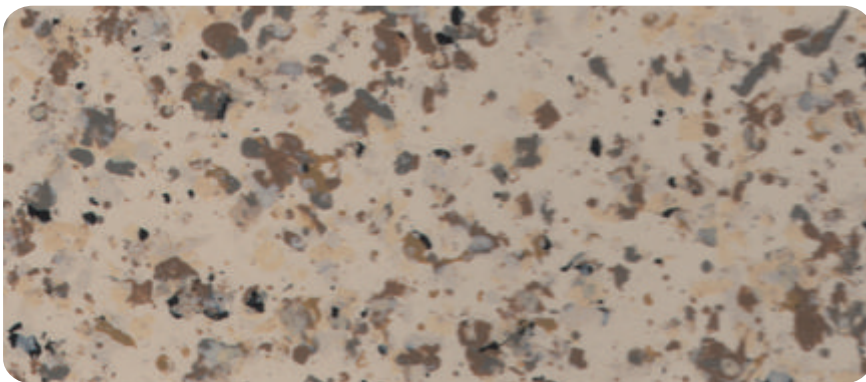


4D08

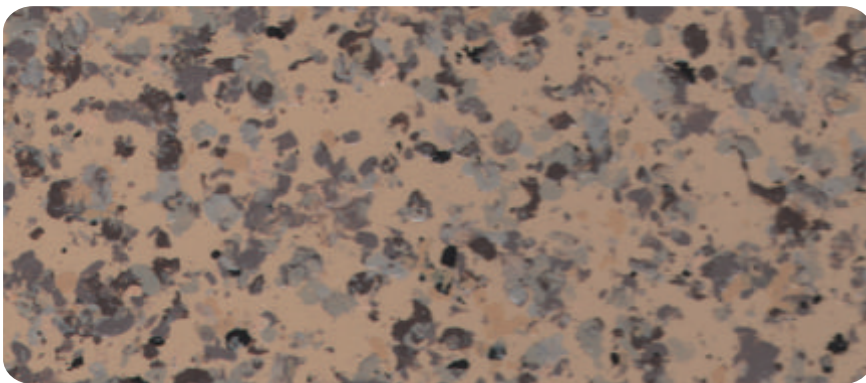


4D09

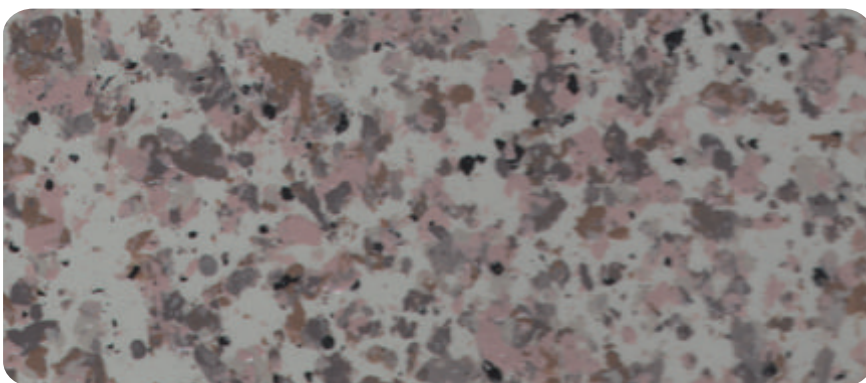


4D10

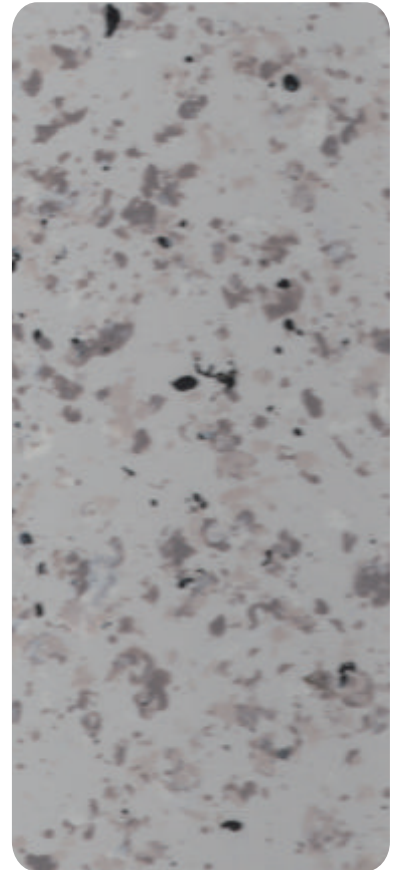


4D11

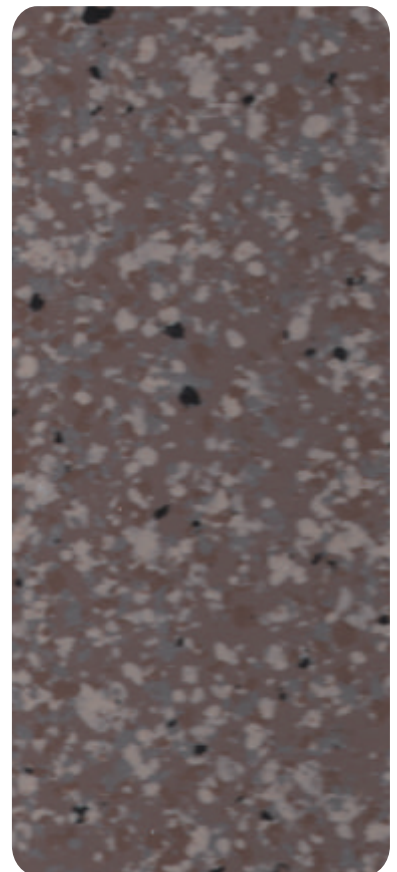


4D12

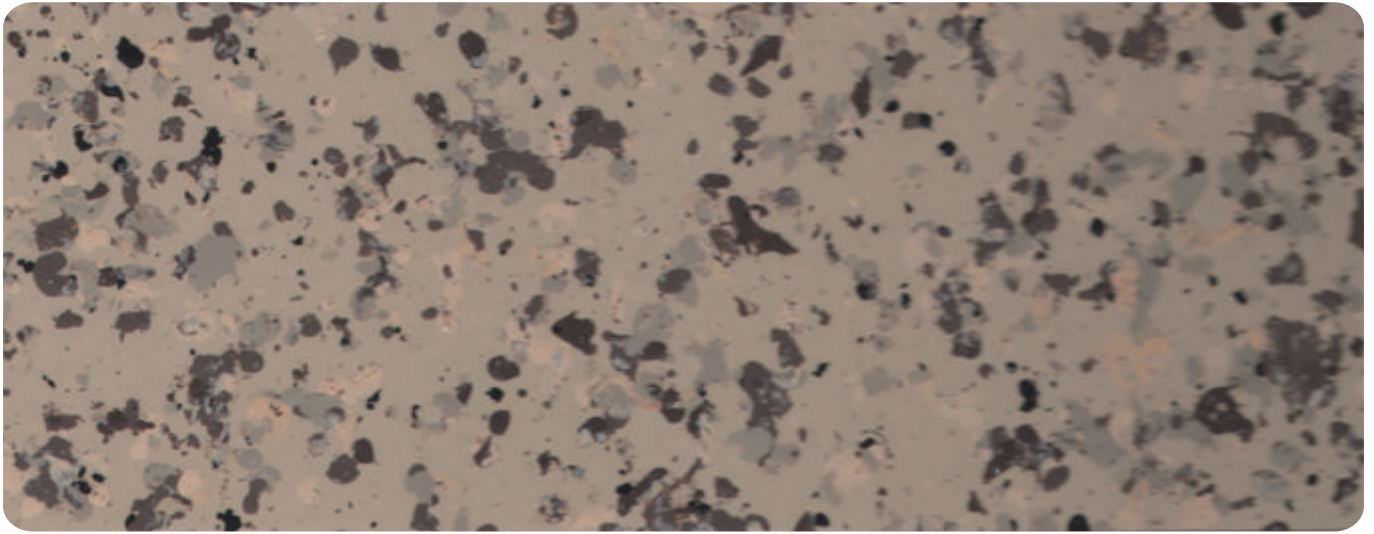


4D13

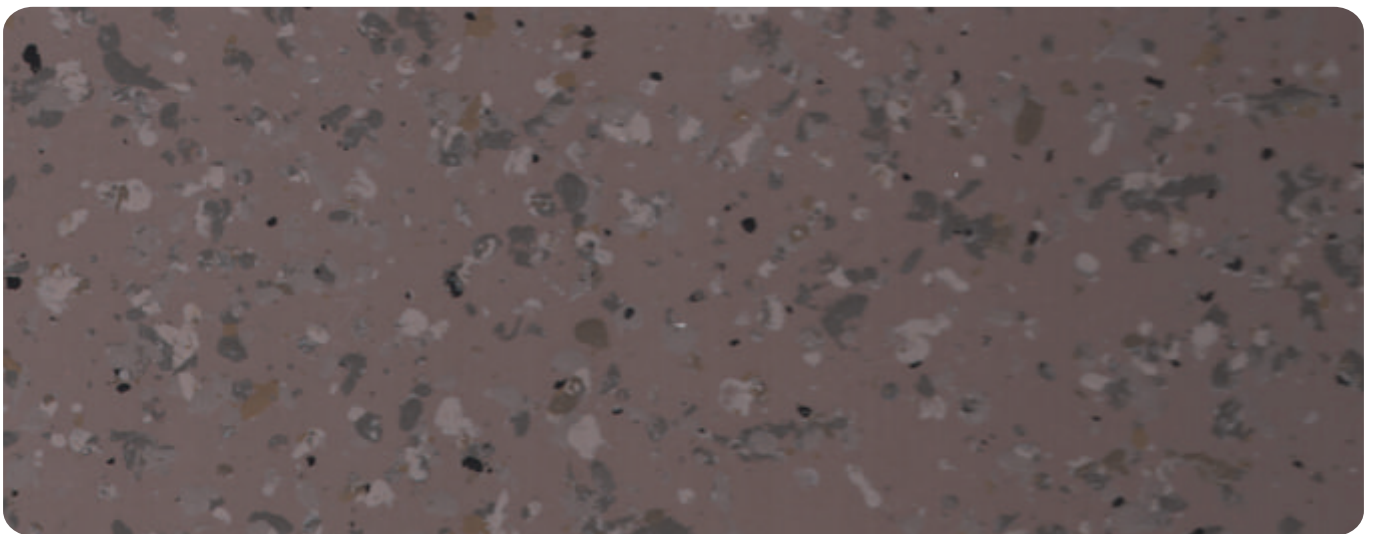


4D14

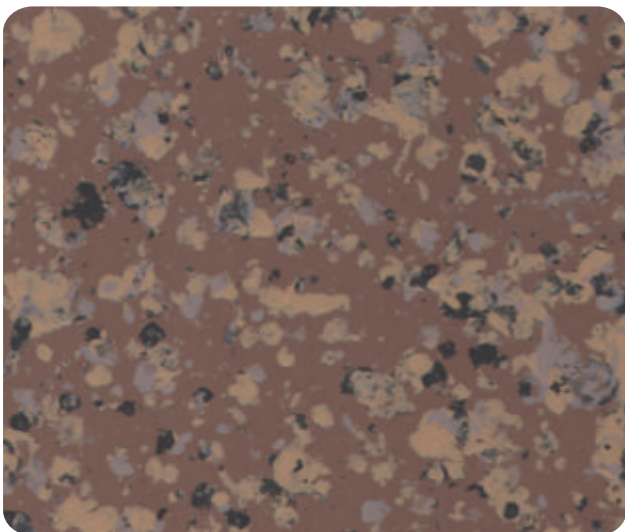


4D15

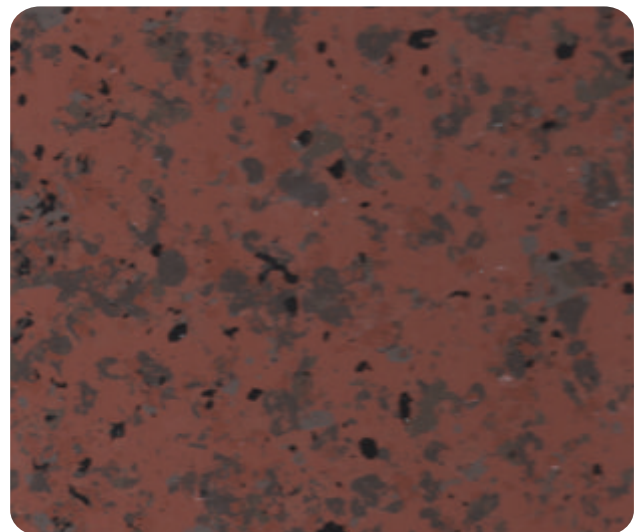


4D16

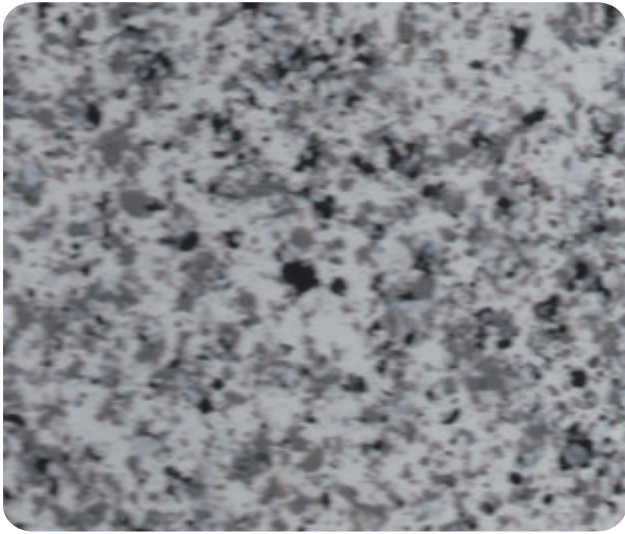

4D17

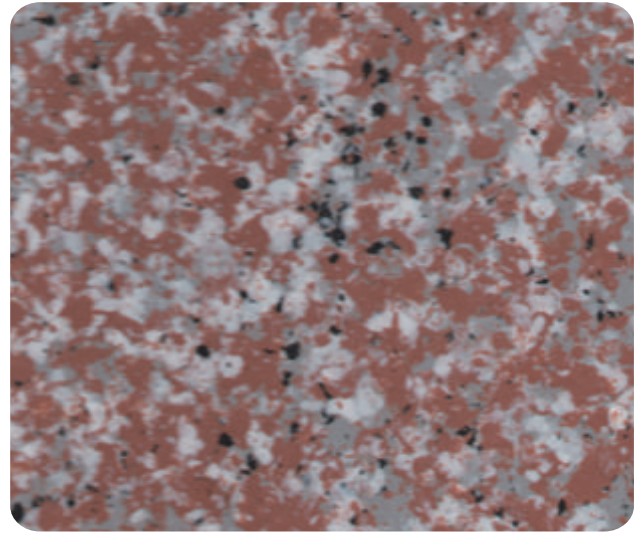


4D18

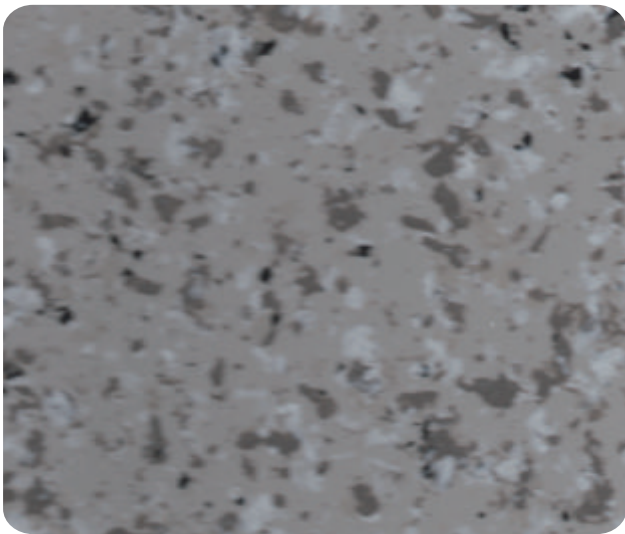


4D19



4D20

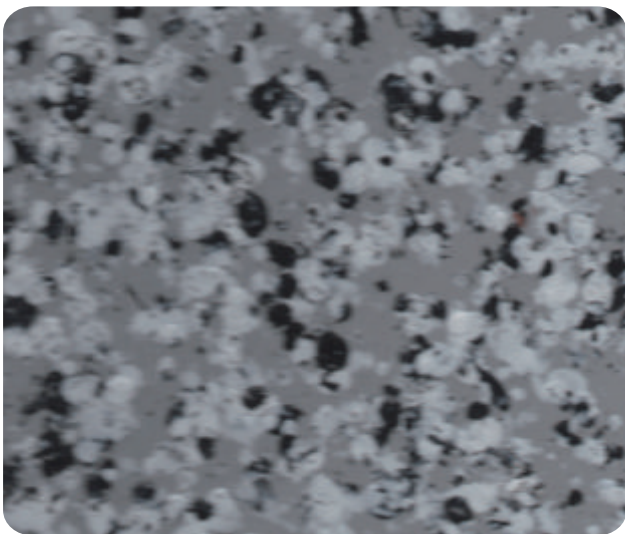

4D21

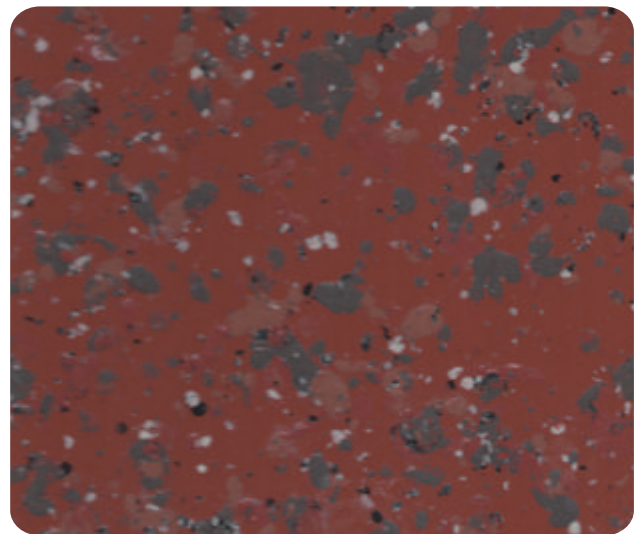

4D22

石文化系列 9 大优势

- ✓ 施工无阻力
- ✓ 无接茬
- ✓ 防返白
- ✓ 无流挂
- ✓ 平滑丰满
- ✓ 真石效果
- ✓ 保水性强
- ✓ 长保不分层
- ✓ 超低损耗



S T O N E

万磊建筑涂料有限公司

Foshan City Nanhai Wanlei Building Paint CO., LTD



广东生产基地（代码FS）

广东省佛山市南海区松岗万石工业区

广西生产基地（代码QT）

广西壮族自治区贵港市覃塘区产业园甘化园区

广州分公司

广州市荔湾区羊城装饰材料市场118号

南宁分公司

广西壮族自治区南宁市兴宁区快环建材市场

△ 注意

公司根据产品技术和发展需要，有权对产品配方进行更新升级，而不对外另行公布，请以最新样板册颜色为准，不便之处，敬请原谅！

4000-147-187 www.fswanlei.com

